

Installation Instructions

Descriptions

The luminaire contains constant-current driver(s) and LED module(s). It works under technical conditions as the product labels indicate. Its modular design makes it convenient to replace whichever of the modules that failed.

Technical Parameter

LED High Bay Light									
Module Quantity	1	1 (wide)	2	3	4	5	6	7	8
Power	60W	60W	120W	180W	240W	300W	360W	420W	480W
Input Voltage	<input type="checkbox"/> 100~240V	<input type="checkbox"/> 100~277V	<input type="checkbox"/> 220~240V	<input type="checkbox"/> 120~277V	<input type="checkbox"/> 277~480V	<input type="checkbox"/> Other_____	Frequency		50/60Hz
Power Factor	0.95								
Working Environment	-40°C~+50°C, 10%~90%RH								
Bolt Torque	17Nm								
Mounting Height	4~25m								
Dimensions	105x300x290mm	120x300x290mm	190x300x290mm	270x300x290mm	350x300x290mm	430x300x355mm	480x300x355mm	560x300x355mm	640x300x355mm
Net Weight	2.4kg	2.5kg	3.8kg	5.2kg	6.2kg	11.2kg	12.5kg	14.3kg	15.6kg
Project Area	0.032m ²	0.036m ²	0.057m ²	0.081m ²	0.105m ²	0.129m ²	0.144m ²	0.168m ²	0.192m ²
Degree of Protection	<input type="checkbox"/> IP54 <input type="checkbox"/> IP65 <input type="checkbox"/> IP66 <input type="checkbox"/> IP67 <input type="checkbox"/> Other_____								


Notes: The above net weight is typical value. The power above are maximum rated power of the model subject to tolerance of 10%.

Applications


Large rooms such as venue, hall, warehouse, factory, gas station, sports center, mall, supermarket, exhibition center, etc.

Installation and Maintenance

Installation




1. Mount the luminaire to the ceiling or wall. (recommend M10 screws) Connect the wires to L, N, and G of AC input.




2. Loosen the screws on the bracket at sides to adjust the fixture to a right angle. Tighten up the screws.


Maintenance




1. Undo the screws to remove the side plates.



2. Undo the screws on ends of the module.




3. Disconnect the cable. Replace the module.




4. Connect the cable and tighten up the connectors. Fixate the new module with screws tightened up. Assemble the side plates with the screws.

Installation Instructions

Cable Connectors



1. Connect the male and female connectors by aligning the indicative arrow on them.



2. Hold the nut on one terminal still, meanwhile, rotating clockwise till the one on the other terminals is tightened up. Otherwise the waterproof performance might be affected.

Wiring

Power Supply End	Earth wire	Neutral wire	Live wire
Fixture End	Yellow-green lead	Blue lead	Brown lead
	Green lead	White lead	Black lead

Caution

- a** Disconnect or turn off power before installation, maintenance and wiring.
- b** Cable connection must be insulated and waterproof.
- c** For luminaires with glass cover: the cover is made of tempered glass which shatters into small pieces without sharp edges when it breaks. Application condition: $-30^{\circ}\text{C}\sim 100^{\circ}\text{C}$; maximum temperature rise $\Delta t 60^{\circ}\text{C}$.
- d** The light source of this luminaire is not replaceable. When the light source's lifetime comes to an end, it is the whole luminaire that should be replaced.


Warning: Danger! Electric shock risk!

(via IEC 60417-6042 (2011-11))




For luminaires with glass cover: The broken cover should be replaced.

Rectangle



Round

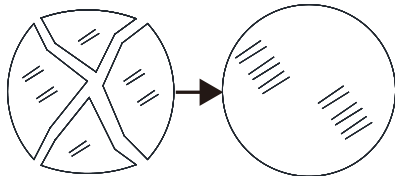

The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling

Remarks

1. This luminaire uses permanent connection on power supply with flexible cable and wires (60245 IEC57). Sufficient length of cable is reserved for connection to AC power. Protection over the connection joint and elimination of tensile force there should be ensured.
2. This luminaire uses type Z attachment: the external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
3. Wiring: the connection to AC power should be operated on terminal blocks in a wiring box with a degree of protection at least equivalent to the luminaire, and there should be devices to fixate wires.
4. The luminaire can be mounted onto ordinary combustible surfaces.